


Example Schematic

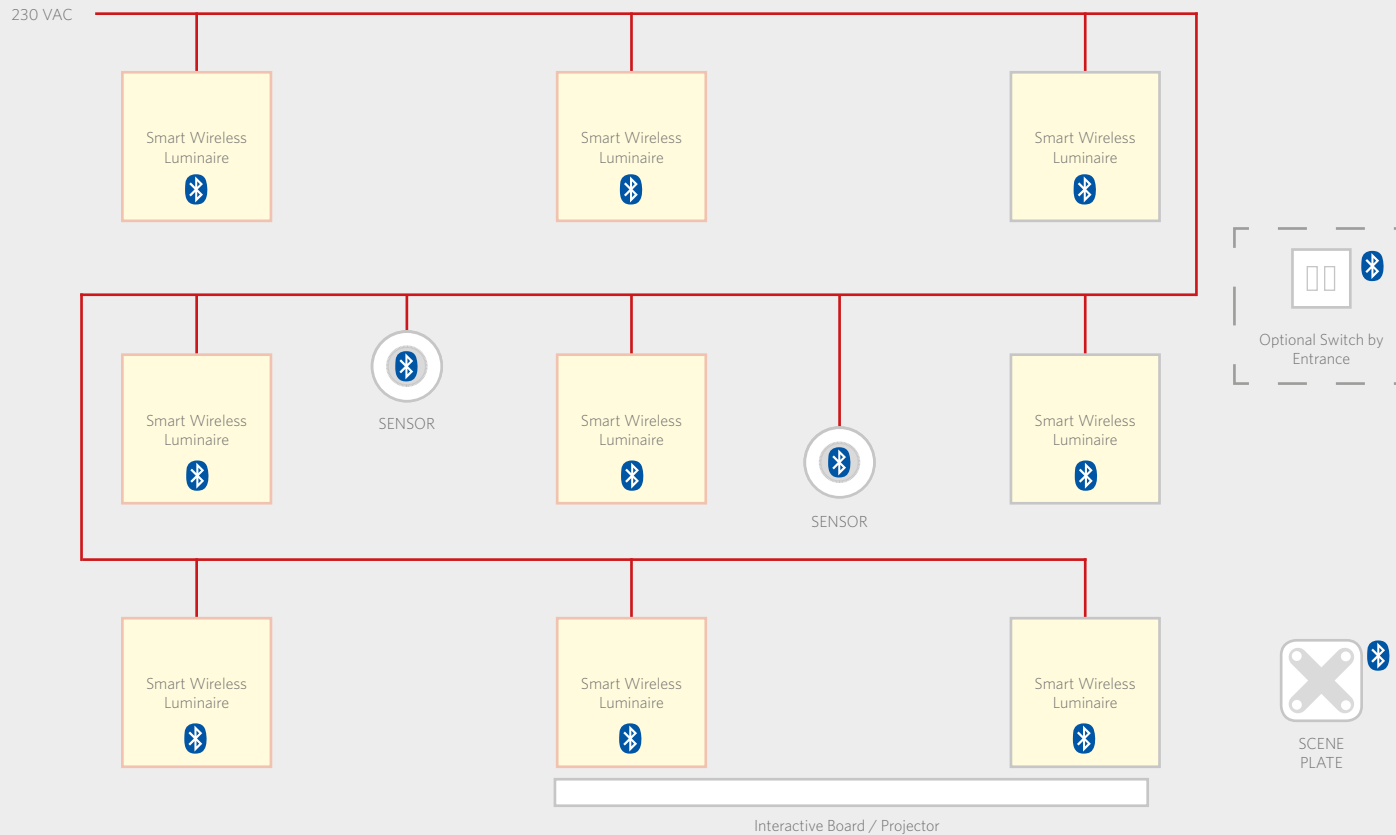

Features

- Absence Detection
- Daylight Harvesting
- Daylight Working Mode
- Projector/Interactive Board Mode
- User Preset Mode
- Raise / Lower Lighting
- Override Off
- Optional Switches for Entrance
- Unswitched mains to all fittings & Sensors
- Retrofit with existing wiring
- Up to 127 Wireless devices per room

System Requirements

- RIDI Smart Wireless luminaires
- Unswitched mains to luminaires
- Unswitched mains to sensors

Class Control Components



Wireless Multisensor
97-CBU-CEFL
Mains Supply



Scene Plate
97-XPRESS
Battery - 2 years



Switch Plate
97-DOLPHIN
Batteryless, Kinetic